
Technical Data Sheet

n. 05 [July 2024]

Vibrational Shakers

COROB EVOshake 700

BASE FEATURES

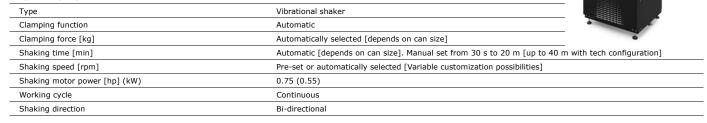

VERSIONS

Panels	Sheet Metal panels
Door type	Semi-automatic with vertical movement or Hinge door

CAN HANDLING FEATURES

Type of cans	Round / Square / Oval
Minimum can height [mm] (in)	50 (2)
Maximum can height [mm] (in)	410 (16.1)
Maximum can diameter [mm] (in)	365 (14.4)
Maximum can weight [kg] (lbs)	35 (77)
Multiple can handling	Yes / 4 x 1G with cartonbox

POWER SUPPLY / MACHINE ENVIRONMENT

Power supply [V]	Single phase; 200-240±10% (with autotransformer 100/110/127V; at 200V power reduction applies)
Frequency [Hz]	50/60
Fuses	F 10 A
Maximum power absorption [W]	650
Working temperature [Celsius] (Fahrenheit)	From 10° to 40° (50° to 104°)
Relative humidity	From 5% to 85% (without condensation)
Noise level [dB(A)]	< 70
Certification	CE/UKCA (ETL certification during 01\2025)

OVERALL DIMENSIONS

Length [mm] (in)	616 (24.2)
Depth [mm] (in)	607 (23.9)
Height [mm] (in)	1132 (44.6)
Footprint [m²] (ft²)	0.37 (4)
Machine Weight [kg] (lbs)	192 (423)
Machine + packaging Weight [kg] (lbs)	217 (478)

EQUIPMENT FEATURES		
Height risers	Optional	
Take note: data refers to base configuration machine, figures may vary according to		

Take note: data refers to base configuration machine, figures may vary according to different specifications. The EVOshake 700 is the standard version not available for the US market. The EVOshake 700 [US] is the version for the US market with the same technical specifications and with a dedicated clamping system.

© COPYRIGHT 2024, CORDS 5, p.A. - All rights reserved in all countries. This information is provided without warranty, representation, inducement or license of any kind. It is accurate to the best CORDS's knowledge or is obtained from sources believed to be accurate. CORDS therefore assumes no legal responsibility for reliance upon given information.



